


# **MAGNUM BOAT LIFTS**

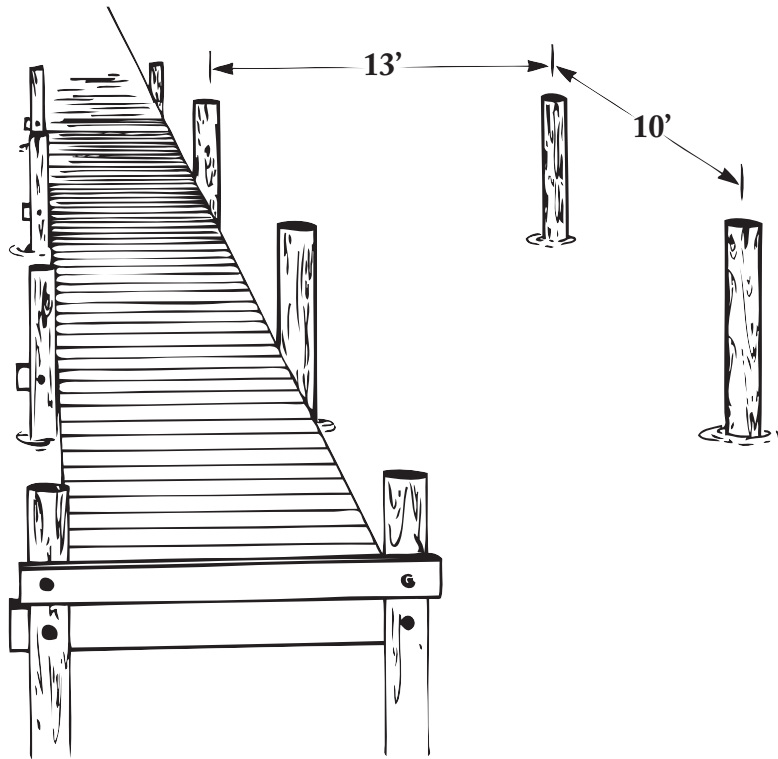

ALL MEASUREMENTS ARE CENTER TO CENTER

---

## **MAGNUM 10,000 LB. GENERAL SPECS**

<b>Piling Size</b>	<b>4ea. 8" or larger dia</b>
<b>Piling Height Requirements</b>	<b>18" above the deck, minimum</b>
<b>Power Requirements</b>	<b>110volt 30amp minimum / 220 volts, 15 amps</b>
<b>Motor Specs</b>	<b>2 - 3/4 HP 1750 RPM</b>
<b>Switching Gear</b>	<b>2 Independent Manual Bremas Switches OPTIONAL: Wireless Remote Control with or without Auto shut-off</b>
<b>Cable Size</b>	<b>7x19 Stainless Steel , 5/16 diameter 9' travel standard, Longer Cable available on request</b>
<b>Cradle Beams</b>	<b>2ea. W6" x 4" x 12 lb. per foot class A36</b>
<b>Bunks</b>	<b>HD : 2 ea. 6" I Beam reinforced 4x6x16' Carpeted Timbers S : 2ea. Carpeted Timber Runners</b>
<b>Drive Units</b>	<b>2 ea. AMS 3000 Worm Gear Drives with Galvanized Backing Plates.</b>
<b>Boat Positioning</b>	<b>4 ea. 8' PVC Guide Stantions with Caps HD : Elevated Outboard Walkway S : Flush Mounted Outboard Walkway</b>