


# **MAGNUM BOAT LIFTS**

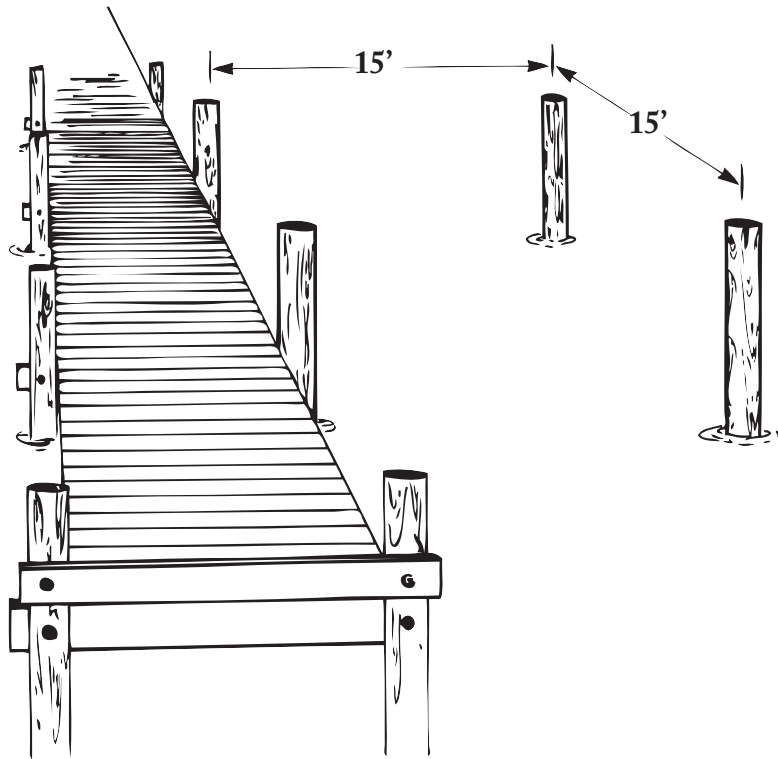

ALL MEASUREMENTS ARE CENTER TO CENTER

---

## **MAGNUM 20,000 LB. GENERAL SPECS**

<b>Piling size</b>	<b>4ea. 8" or larger dia</b>
<b>Piling Height Requirements</b>	<b>24" above the deck, minimum</b>
<b>Power Requirements</b>	<b>220volt 30amp minimum / 2 x 110 volts, 30 amps</b>
<b>Motor Specs</b>	<b>4 - 3/4 HP 1750 RPM</b>
<b>Switching Gear</b>	<b>4 Independent Manual Bremas Switches OPTIONAL: Wireless Remote Control with or without Auto Shut-Off</b>
<b>Cable Size</b>	<b>7x19 Stainless Steel , 5/16 diameter 10' travel standard, Longer Cable available on request</b>
<b>Cradle Beams</b>	<b>2ea. W8" x 4" x 18.4 lb. per foot Galvanized Steel I Beam, class 50</b>
<b>Bunks</b>	<b>HD : 2 ea. Galvanized Steel I Beam Reinforced 4x6x16' Timbers</b>
<b>Drive Units</b>	<b>2 ea. AMS 3000 Worm Gear Drives with Galvanized Backing Plates OPTIONAL: E-Gear Drives</b>
<b>Boat Positioning</b>	<b>4 ea. 8' PVC Guide Stantions with Caps HD : Elevated Outboard Walkway</b>