


MAGNUM BOAT LIFTS

PILING PLACEMENT MEASUREMENTS ARE CENTER TO CENTER

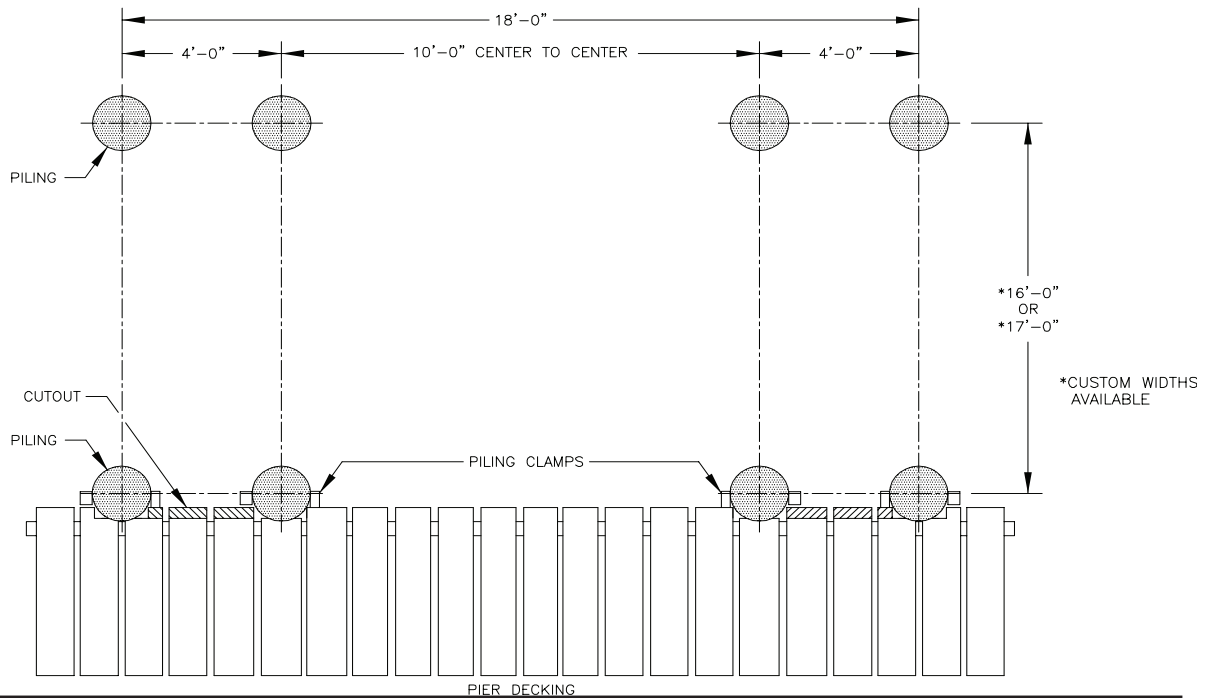

MAGNUM 25K / 30K / 40K GENERAL SPECS

| | 25,000 lb. | 30,000 lb. | 40,000 lb. |
|--------------------|---|---|---|
| Number of Pilings | 8 ea. 10" - 12" dia | 8 ea. 10" - 12" dia. | 8 ea. 10" - 12" dia. |
| Height of Pilings | 4' | 4' | 4' |
| Power Requirements | 220 volts, 40 amps | 220 volts, 40 amps | 220 volts, 40 amps |
| Motor Specs | 4 - 1 HP 1750 RPM | 4 - 1 HP 1750 RPM | 4 - 1 ½ hp 1750 RPM |
| Switching Gear | Wireless Remote Control with Auto Shut-off | Wireless Remote Control with Auto shut-off | Wireless Remote Control with Auto shut-off |
| Cable Size | 7x19 Stainless Steel 5/16 diameter 45' | 7x19 Stainless Steel 3/8 diameter 45' | 7x19 Stainless Steel 3/8 diameter 45' |
| Cradle Beams | 2ea. 10x4 class 50 19 lb. per foot | 2 ea. 10x5 class 50 26 lb. per foot | 2 ea. 12x5 class 50 35 lb. per foot |
| Bunks | 2ea. 8" I Beam Reinforced 4x6x16' Timbers | 2 ea. 8" I Beam Reinforced 4x6x16' Timbers | 2 ea. 8" I Beam Reinforced 4x6x16' Timbers |
| Drive Units | AMS 4000 E-Gear AMS E-Gear Direct Drive | AMS 5000 E-Gear AMS E-Gear Direct Drive | AMS 5000 E-Gear AMS E-Gear Direct Drive |
| Power Beams | 4 ea. 5"H. x 10"W x 5'L | 4 ea. 5"H x 10"W x 5'L | 4 ea. 5"H x 10"W x 5'L |
| Bearings | 8 ea. Pillow Block | 8 ea. Pillow Block | 8 ea. Pillow Block |
| Drum Size | 2" x 7/16 dia. | 2" x 7/16 dia. | 2" x 7/16 dia. |