


MAGNUM BOAT LIFTS

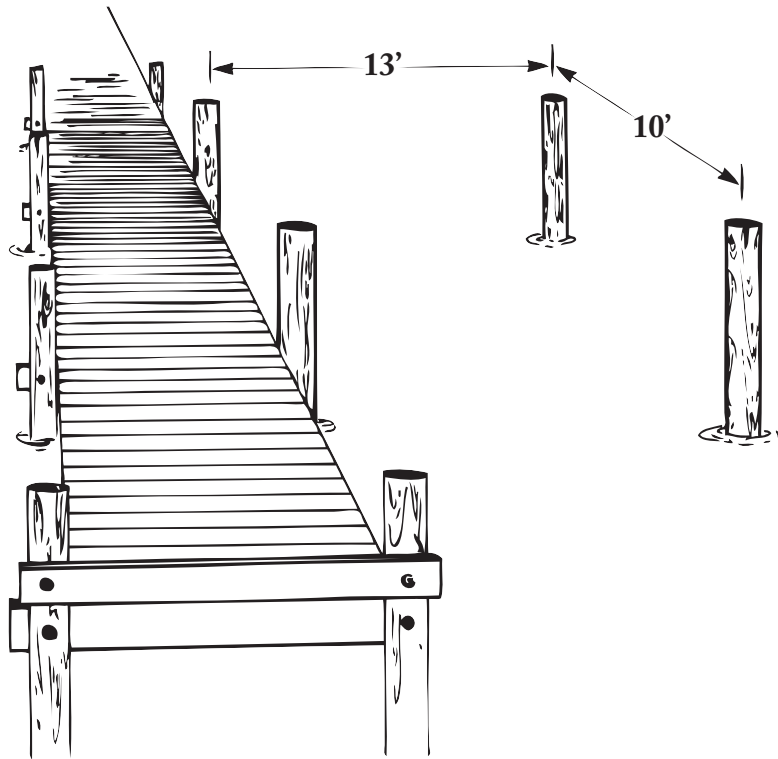

ALL MEASUREMENTS ARE CENTER TO CENTER

MAGNUM 8,000 LB. GENERAL SPECS

Piling Size	4ea. 8" or larger dia
Piling Height Requirements	18" above the deck, minimum
Power Requirements	110volt 30amp minimum / 220 volts, 15 amps
Motor Specs	2 - 3/4 HP 1750 RPM
Switching Gear	2 Independent Manual Bremas Switches OPTIONAL: Wireless Remote Control with or without Auto shut-off
Cable Size	7x19 Stainless Steel , 1/4 diameter 9' travel standard, Longer Cable available on request
Cradle Beams	2ea. W6" x 4" x 12 lb. per foot class A36
Bunks	HD : 2 ea. 6" I Beam reinforced 4x6x16' Carpeted Timbers S : 2ea. Carpeted Timber Runners
Drive Units	2 ea. AMS 3000 Worm Gear Drives with Galvanized Backing Plates.
Boat Positioning	4 ea. 8' PVC Guide Stantions with Caps HD : Elevated Outboard Walkway S : Flush Mounted Outboard Walkway